


TE DOBLE ENCHUFE DERIVACIÓN BRIDA APV-004

EN-681-1

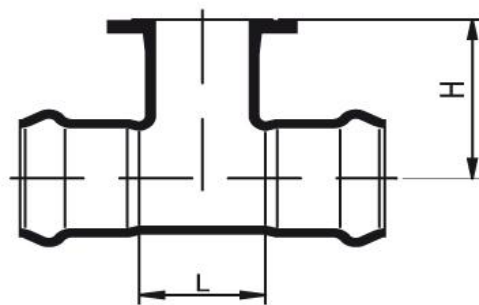

DN	dn	L (mm)	H (mm)
63	50	87	135
	60	87	135
75	50	85	140
	60	85	140
90	50	105	155
	60	105	155
	80	105	155
110	50	86	170
	60	86	170
	80	126	170
	100	126	170
125	50	116	170
	60	116	170
	80	116	170
	100	160	170
	125	160	170
140	50	116	190
	60	116	190
	80	116	190
	100	161	190
	125	161	190
160	50	125	210
	60	125	210
	80	125	210
	100	197	210
	125	197	210

DN	dn	L (mm)	H (mm)
160	150	197	210
	80	146	250
	100	146	250
200	125	246	250
	150	246	250
	200	246	250
	80	126	265
225	100	246	265
	150	246	265
	200	246	265
	80	156	275
250	100	156	275
	150	309	275
	200	309	275
	250	309	275
	150	308	285
280	200	308	285
	250	308	285
	80	208	300
315	100	208	300
	150	208	300
	200	360	300
	300	360	300

CARACTERÍSTICAS:

TE Doble Enchufe Derivación Brida APV-004.

Realizada en **Fundición Dúctil EN 1563**.

Acabado con **pintura Epoxi Azul**.

Junta de estanqueidad en EPDM según Norma UNE EN-681-1.

